


12"-26" Pipe Facing Machine TECHNICAL SPECIFICATIONS AND FEATURES

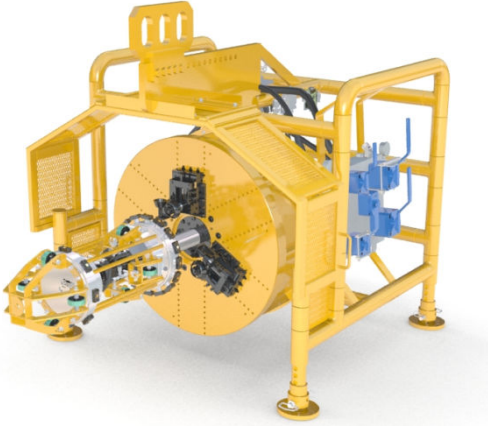

| | |
|--------------------|---|
| Length | 110" (2794mm) |
| Width | 54" (1372mm) |
| Height | 66" (1676mm) |
| Weight | 5000 lbs |
| Operating Pressure | Rotation: 2000psi @ 40gpm max Feed: 600psi @ 2gpm max Clamp: 350psi |
| Cutting Speed | 270 Surface feet @ 100rpm - Min 12" pipe 488 Surface feet @ 100 rpm - Min 22" pipe |

Features / Advantages

- Interchangeable clamping sections - each section can clamp up in at least two different pipe sizes
- Easily adapts to any bevel configuration including modified "J" bevel for automatic welding
- Brush adapters clean the inside and outside of the pipe during facing operation
- Machine will counterbore 16-26" pipe to facilitate wall thickness changes (boring tool optional)
- Parker PrestoLok Fittings
- Variable hydraulic feed with fast feed option
- Counter clockwise rotation (facing the flywheel)
- Length 92" (2337mm)
- Width 75" (1905mm)
- Height 66" (1650mm)
- Fuel Capacity 30gal (151.4 L)
- Hydraulic Oil Capacity 1100gal (567 L)
- Engine 109 hp (80 kw)
- Fuel Consumption 4.86 gph (18.4 L)
- Precise feed control for metering depth of cut
- Needle bearing dovetail tool design for smoother action