


6"-8" Hydraulic Wedge Mandrel - Non Powered
TECHNICAL SPECIFICATIONS AND FEATURES

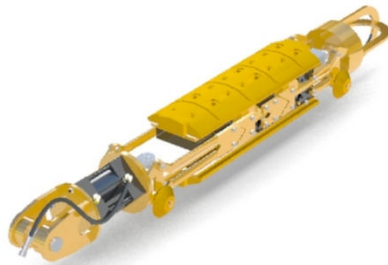

Length	62" (1549mm)
Width	7" (175mm)
Height	8" (203mm)
Weight	185 lbs (84 Kg)
Air Motor	Non Powered
Cylinder	3 1/4" (79.4mm)
Working Air Pressure	180-210psi 300-500psi
Pipe Size Range	6"-8" (152-203mm)
Wall Thickness Range	.156"-.500" (4 - 12.7mm)

Features / Advantages

- Adjustable for any wall thickness within specified mandrel range. Can cover 2 pipe sizes through use of conversion kits.
- Wedges that are case hardened and bolt on to the wedge plates
- Long wedges reduce the need for shimming
- Grade 8 bolts and the highest quality Parker seals and u-cups
- Tapered wheels eliminate rolling
- Slide locks pull the belly of the mandrels up to eliminate drag in the pipe
- Powerful oversized cylinders provide maximum force
- Equipped with Filters, lubricators, regulators & valves that are all rated to 250 psi
- Remote operated by reach rod

Performance

- High strength alloys used in construction